

PANO 3.25"

WOODWORKS®

LINEAR SOLID & VENEERED WOOD PANELS



CERTIFICATIONS & COMPLIANCE




FEATURES




PERFORMANCE

- Coordinates with Woodworks® Linear & Veneered ceiling panel
- Up to 122lm/W
- High performance opal cover
- Remote mountable LED driver
- Damp rated




WoodWorks® Grille Ceiling Integration

Linear Solid Wood Panel



Linear Veneered Panel

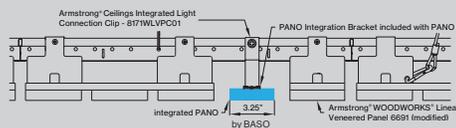

REMOTE MOUNTING

Quick and easy electrical connection



Catalog Number Example

PANO3-WLV-BL-PS-OP-27K-C80-UNV-010V-0875LF-ST-04FT



A RANGE

PANO 3.25" P A N O 3

H VOLTAGE

120V / 277V U N V

B CEILING TYPE

WoodWorks® linear W L S
solid wood panels
WoodWorks® linear W L V
veneered panels

please contact your Armstrong® ceilings rep for the Integrated Light Connection Clip for the specified ceiling type

I DIMMING

0-10V 1% 0 1 0 V
Lutron EcoSystem L E S 1
Quantum, Vive, GRAFIK Eye, HomeWorks
Power over ethernet P O E C
consult customer service for compatibility
Custom dimming X X X X
consult customer service for compatibility

C COLOR

White W H
Black B L

J OUTPUT LM/FT

450lm/ft 100% ↓ 0 4 5 0 L F
675lm/ft 100% ↓ 0 6 7 5 L F
875lm/ft 100% ↓ 0 8 7 5 L F

D POWER FEED LENGTH

4' standard integrated P S
10' medium remote option P M
30' long remote option P L

power feed distance denotes secondary wiring from detachable driver box to fixture; driver box comes with a 6ft conduit for primary wiring

K CIRCUIT / EM

Single circuit *
* leave blank
EMB EM battery pack E M B
emergency battery pack only for 120/ 277V option (90 minute emergency operation)

E LENS

HP opal cover O P

L SHAPE / PATTERN

Linear / straight S T

F CCT

2700K 2 7 K
3000K 3 0 K
3500K 3 5 K
4000K 4 0 K
Custom CCT X X K

M DIMENSIONS IN FT

4' fixture 0 4 F T
6' fixture 0 6 F T
8' fixture 0 8 F T

fixture replaces full length of ceiling panel; please see table on next page and fixture length dimensions

G CRI

CRI > 80 C 8 0
CRI > 90 C 9 0

BASO

basolighting.com

CS-V01

03/2025



Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LUMEN DIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
PANO 3.25"								
e LED	8' opal	40 K	29.5 W	3600 lm	100% down	3600 lm	79%	122 lm/W
e ² LED	8' opal	40 K	44.7 W	5400 lm	100% down	5400 lm	79%	121 lm/W
e ²⁺ LED	8' opal	40 K	58.9 W	7000 lm	100% down	7000 lm	79%	119 lm/W

for 27 K, 30 K or 35 K multiply lm value by 0.96

WoodWorks® Grille Ceiling System Integration

(for more ceiling options, please see CEILING OPTIONS pages)

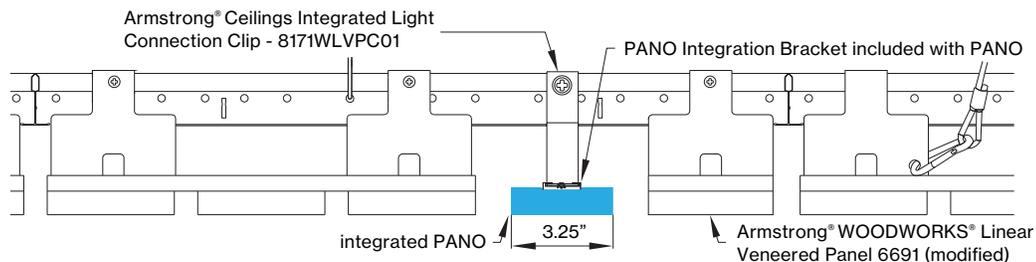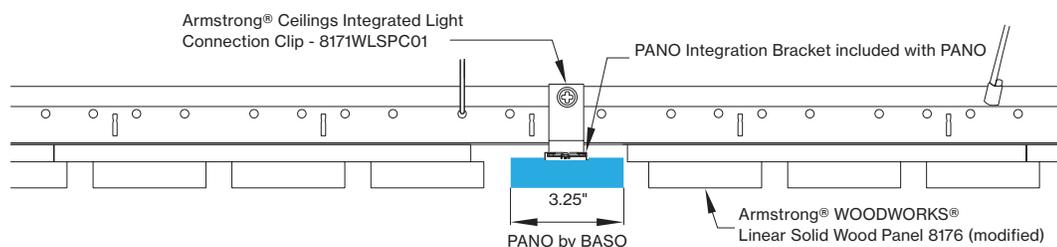

Available lengths for ceiling types

CEILING TYPE	2 FT	4 FT	6 FT	8 FT
WoodWorks® Grille Tegular 9/16	23.375"	47.375"	n/a	n/a
WoodWorks® Grille Tegular 15/16	23"	47"	n/a	n/a
WoodWorks® Grille Classic	23"	47"	71"	95"
WoodWorks® Grille Forte	*23"	47"	71"	95"
WoodWorks® Linear Solid Wood panels	*23"	*47"	*71"	95"
WoodWorks® Linear Veneered panels	*23"	*47"	*71"	95.25"

*Woodworks ceilings are not available in this length. Wood panels need to be cut in the field to fit this length.


WoodWorks® ceiling systems

BASO PANO is only approved for Armstrong® WoodWorks Grille Tegular 9/16, WoodWorks Grille Tegular 15/16, WoodWorks Grille, WoodWorks Linear Solid Wood panels and WoodWorks Linear Veneered panels ceiling systems. Refer to armstrongceilings.com for installation instructions related to the ceiling products.


DIMENSIONS

PANO 3.25"


WLS - ARMSTRONG® WOODWORKS® LINEAR SOLID WOOD PANELS

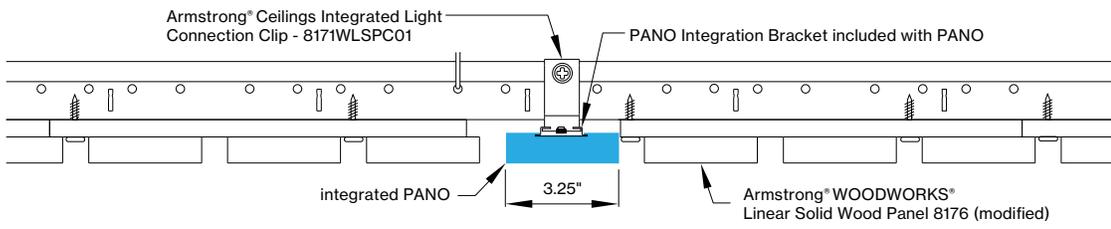


WLS view from below

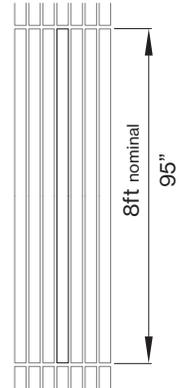

WLV - ARMSTRONG® WOODWORKS® LINEAR VENEERED PANELS

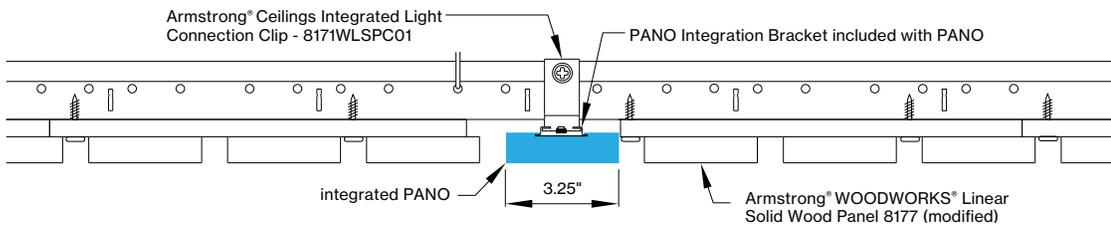

WLV view from below

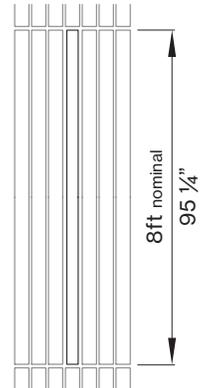

PANO mounting instructions

Get access to the PANO mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/pano>

