


# PANO 5.25"

WOODWORKS®

LINEAR SOLID & VENEERED WOOD PANELS

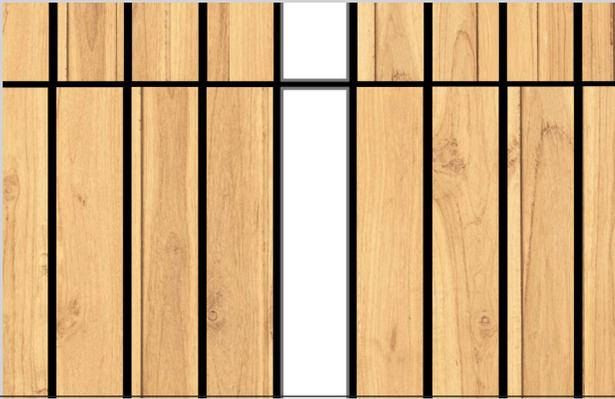

## CERTIFICATIONS & COMPLIANCE




## FEATURES




## PERFORMANCE

- Coordinates with Woodworks® Linear & Veneered ceiling panel
- Up to 124lm/W
- High performance opal cover
- Remote mountable LED driver
- Damp rated




## WoodWorks® Grille Ceiling Integration

### Linear Solid Wood Panel



### Linear Solid Wood Panel

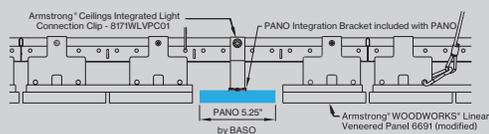

## REMOTE MOUNTING

Quick and easy electrical connection

### REMOTE MOUNTING



## Catalog Number Example

PANO5-WLS-BL-PS-OP-27K-C80-UNV-010V-0550LF-ST-04FT



### A RANGE

PANO 5.25" PANO 5

### H VOLTAGE

120V / 277V UNV

### B CEILING TYPE

WoodWorks® linear WLS  
solid wood panels  
WoodWorks® linear WL V  
veneered panels

please contact your Armstrong® ceilings rep for the Integrated Light Connection Clip for the specified ceiling type

### I DIMMING

0-10V 1% 0 1 0 V  
Lutron EcoSystem LES 1  
Quantum, Vive, GRAFIK Eye, HomeWorks  
Power over ethernet POEC  
consult customer service for compatibility  
Custom dimming X X X X  
consult customer service for compatibility

### C COLOR

White WH  
Black BL

### J OUTPUT LM/FT

550lm/ft 100% ↓ 0 5 5 0 L F  
775lm/ft 100% ↓ 0 7 7 5 L F  
1000lm/ft 100% ↓ 1 0 0 0 L F

### D POWER FEED LENGTH

4' standard integrated PS  
10' medium remote option PM  
30' long remote option PL

power feed distance denotes secondary wiring from detachable driver box to fixture; driver box comes with a 6 ft conduit for primary wiring

### K CIRCUIT / EM

Single circuit \*  
\* leave blank  
EMB EM battery pack EMB  
emergency battery pack only for 120/ 277V option (90 minute emergency operation)

### E LENS

HP opal cover OP

### L SHAPE / PATTERN

Linear / straight ST

### F CCT

2700K 2 7 K  
3000K 3 0 K  
3500K 3 5 K  
4000K 4 0 K  
Custom CCT X X K

### M DIMENSIONS IN FT

4' fixture 0 4 F T  
6' fixture 0 6 F T  
8' fixture 0 8 F T

fixture replaces full length of ceiling panel; please see table on next page and fixture length dimensions

### G CRI

CRI > 80 C 8 0  
CRI > 90 C 9 0

BASO

basolighting.com

CS-V01

03/2025


**Technical data**

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LUMEN DIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
<b>PANO 5.25"</b>								
e LED	8' opal	40 K	35.4 W	4400lm	100% down	4400lm	81%	110lm/W
e <sup>2</sup> LED	8' opal	40 K	50.5 W	6200lm	100% down	6200lm	81%	106lm/W
e <sup>2+</sup> LED	8' opal	40 K	67.3 W	8000lm	100% down	8000lm	81%	98lm/W

for 27 K, 30K or 35K multiply lm value by 0.96

**WoodWorks® Grille Ceiling System Integration**

(for more ceiling options, please see CEILING OPTIONS pages)

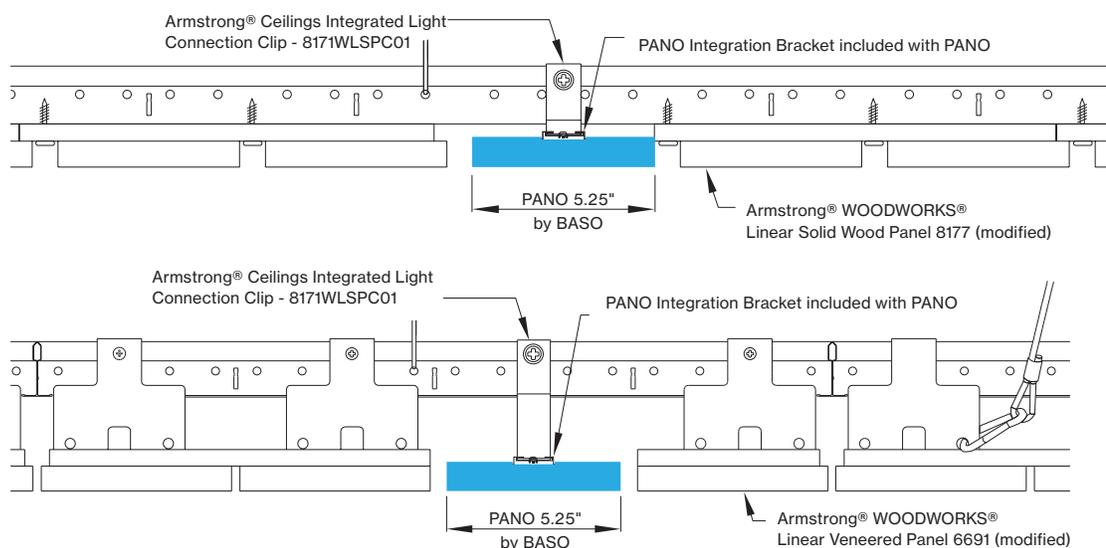

**Available lengths for ceiling types**

CEILING TYPE	2FT	4FT	6FT	8FT
WoodWorks® Grille Tegular 9/16	23.375"	47.375"	n/a	n/a
WoodWorks® Grille Tegular 15/16	23"	47"	n/a	n/a
WoodWorks® Grille Classic	23"	47"	71"	95"
WoodWorks® Grille Forte	*23"	47"	71"	95"
WoodWorks® Linear Solid Wood panels	*23"	*47"	*71"	95"
WoodWorks® Linear Veneered panels	*23"	*47"	*71"	95.25"

\*Woodworks ceilings are not available in this length. Wood panels need to be cut in the field to fit this length.

**INTEGRATED LIGHT CONNECTION CLIP**

Armstrong® Ceilings Integrated Light Connection Clip

visit [armstrongceilings.com/linearlighting](http://armstrongceilings.com/linearlighting)


please contact your Armstrong Ceilings rep

**WoodWorks® ceiling systems**


BASO PANO is only approved for Armstrong® WoodWorks Grille Tegular 9/16, WoodWorks Grille Tegular 15/16, WoodWorks Grille, WoodWorks Linear Solid Wood panels and WoodWorks Linear Veneered panels ceiling systems. Refer to [armstrongceilings.com](http://armstrongceilings.com) for installation instructions related to the ceiling products.

## DIMENSIONS


### WLS - ARMSTRONG® WOODWORKS® LINEAR SOLID WOOD PANELS

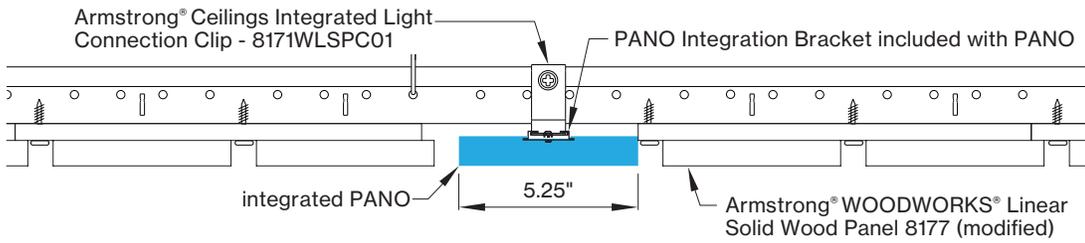


WLS view from below

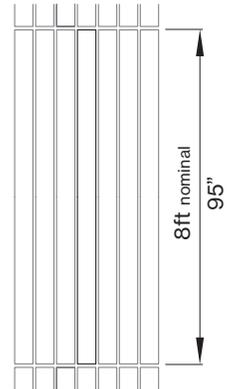

### WLV - ARMSTRONG® WOODWORKS® LINEAR VENEERED PANELS

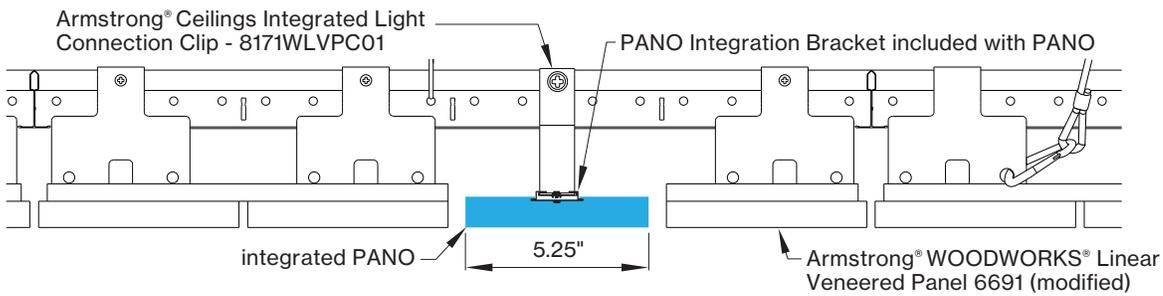

WLV view from below

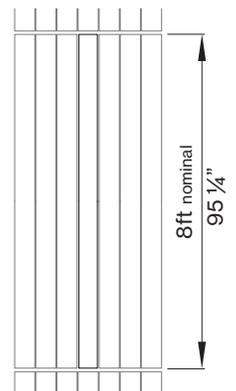

### PANO mounting instructions

Get access to the PANO mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/pano>

