


R-LINE[®]

CURVE




CERTIFICATIONS & COMPLIANCE

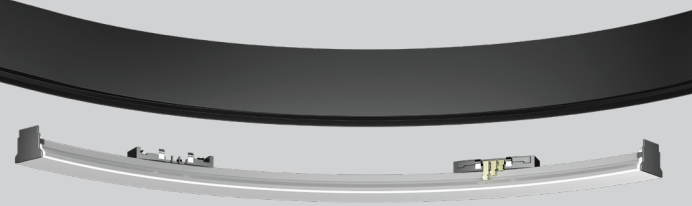

FEATURES

5 YEAR
limited
led warranty

CONFIGURATIONS

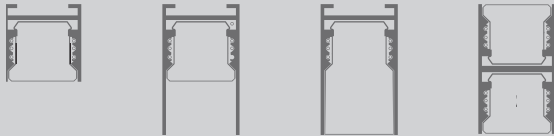


R1 Track
1" Inset

R2 Track
1" Inset

R2 Track
2" Inset

R3 Track
1" Inset

COLORS



Black

White

Catalog Number Example

RLINS-OPAL-1-BL-T2765-C90-48V-010V-TW-700LF-7WF-R24A90

A B C D E F G H I J

A SYSTEM

R-LINE R L I N S

B PRODUCT

Curve Opal O P A L

C INSET HEIGHT

1" flush with R1/R3 Track 1
2" Inset flush with R2 track 2

D ADAPTER COLOR

Black B L
White W H
recommendation: adapter & track color should match

D CCT/CRI

2700K / CRI >90 2 7 K - C 9 0
3000K / CRI >90 3 0 K - C 9 0
3500K / CRI >90 3 5 K - C 9 0
4000K / CRI >90 4 0 K - C 9 0
2700-6500K / CRI >90 T 2 7 6 5 - C 9 0
1800-4000K / CRI >90 T 1 8 4 0 - C 9 0

F VOLTAGE

48V low constant voltage 4 8 V
remote driver required (see driver cutsheet)

G DIMMING

0-10V 1% dimming 0 1 0 V

H CIRCUIT

Static White 1 or 2 Circuit *
Tunable White (TW) T W
*leave blank

I OUTPUT

300 lm/ft. 3W/ft. 3 0 0 L F - 3WF
700 lm/ft. 7W/ft. 7 0 0 L F - 7WF

J DIMENSION

Radius 18"/90° R 1 8 A 9 0
Radius 24"/90° R 2 4 A 9 0
Radius 36"/90° R 3 6 A 9 0

Optional Accessories

ships seperately

OPTIONAL

Inset with Power Connector P C
Inset with Power Feed P F

Other Options

+ LOUVER

see R-Line Louver cutsheet


+ CURVE OPAL

see R-Line Curve Opal cutsheet

+ SPOT CURVE OPAL

see R-Line Spot cutsheet

DIMENSIONS

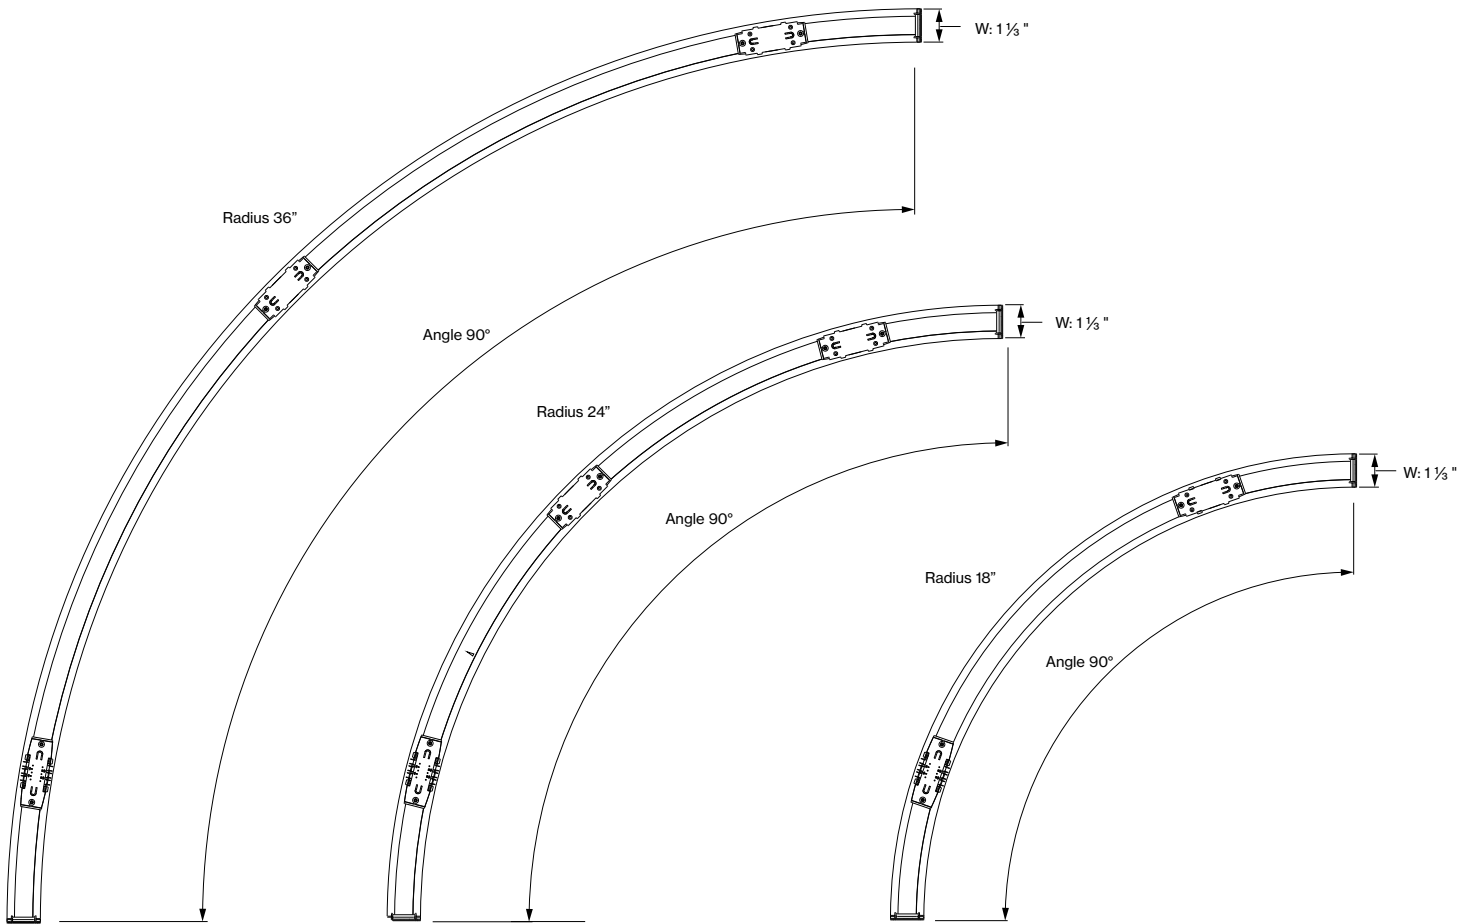

Catalog ID	Dimensions	Output	Wattage
R18A45	Radius 18"/45°	300lm/ft	4W/inset
R18A90	Radius 18"/90°	300lm/ft	8W/inset
R24A45	Radius 24"/45°	300lm/ft	5W/inset
R24A90	Radius 24"/90°	300lm/ft	9W/inset
R36A45	Radius 36"/45°	300lm/ft	8W/inset
R36A90	Radius 36"/90°	300lm/ft	15W/inset
R18A45	Radius 18"/45°	700lm/ft	9W/inset
R18A90	Radius 18"/90°	700lm/ft	18W/inset
R24A45	Radius 24"/45°	700lm/ft	11W/inset
R24A90	Radius 24"/90°	700lm/ft	21W/inset
R36A45	Radius 36"/45°	700lm/ft	18W/inset
R36A90	Radius 36"/90°	700lm/ft	35W/inset

R-LINE mounting instructions

Get access to the R-LINE
mounting instructions faster by
scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/baso>

