


R-LINE[®]

LINEAR



CERTIFICATIONS & COMPLIANCE

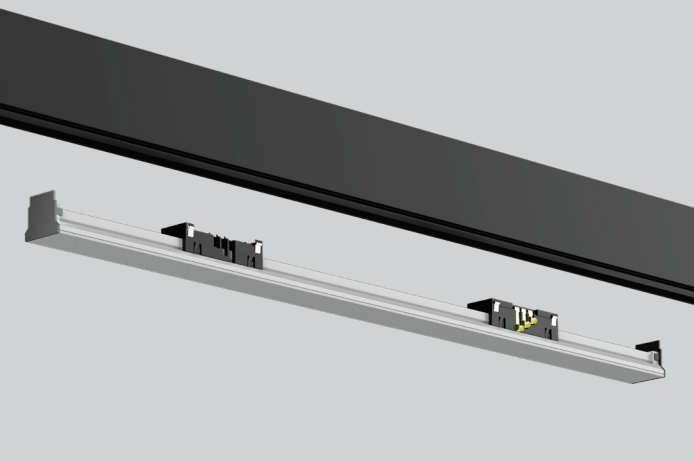

FEATURES

5 YEAR
limited
led warranty

CONFIGURATIONS



R1 Track
1" Inset



R2 Track
1" Inset




R2 Track
2" Inset



R3 Track
1" Inset

EMERGENCY CIRCUIT BRACKET* (DETAIL)

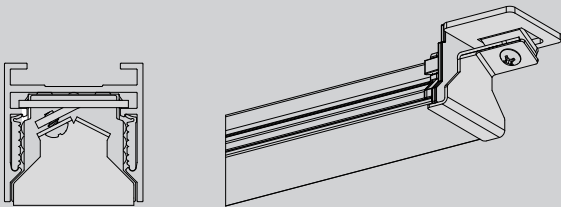

COLORS



Black



White

Catalog Number Example

RLINS-OPAL-1-BL-T2765-C90-48V-010V-TW-700LF-7WF-04FT-EMC

A	B	C	D	E	F	G	H	I	J	K
---	---	---	---	---	---	---	---	---	---	---

A SYSTEM

R-LINE R L I N S

B PRODUCT

Linear Opal O P A L

C INSET HEIGHT

1" Inset flush with R1/R3 track	1
2" Inset flush with R2 track	2

D ADAPTER COLOR

Black	B L
White	W H

recommendation: adapter & track color should match

D CCT/CRI

2700K / CRI >90	2 7 K - C 9 0
3000K / CRI >90	3 0 K - C 9 0
3500K / CRI >90	3 5 K - C 9 0
4000K / CRI >90	4 0 K - C 9 0
2700-6500K / CRI >90	T 2 7 6 5 - C 9 0
1800-4000K / CRI >90	T 1 8 4 0 - C 9 0

F VOLTAGE

48V low constant voltage	4 8 V
--------------------------	-------

remote driver required (see driver cutsheet)

G DIMMING

0-10V 1% dimming	0 1 0 V
------------------	---------

H CIRCUIT

Static White 1 or 2 Circuit	*
Tunable White (TW)	T W

*leave blank

I OUTPUT

300 lm/ft. 3W/ft.	3 0 0 L F - 3 W F
700 lm/ft. 7W/ft.	7 0 0 L F - 7 W F

J DIMENSION

1 FT	0 1 FT
2 FT	0 2 FT
3 FT	0 3 FT
4 FT	0 4 FT

Optional Accessories

ships seperately

K EMERGENCY CIRCUIT*

Emergency Circuit Brackets	E M C
----------------------------	-------

set of brackets to permanetly secure linear opal inset

OPTIONAL

Inset with Power Connector	P C
Inset with Power Feed	P F

Other Options

+ LOUVER

see R-Line Louver cutsheet

+ CURVE OPAL

see R-Line Curve Opal cutsheet

+ SPOT CURVE OPAL





see R-Line Spot cutsheet

BASO
basolighting.com

CS-V01

05/2025

DIMENSIONS

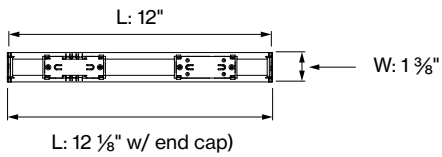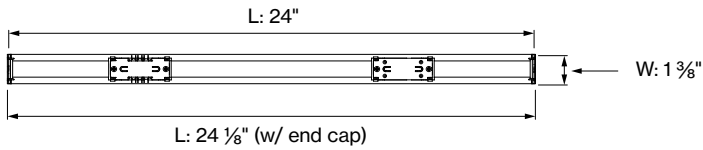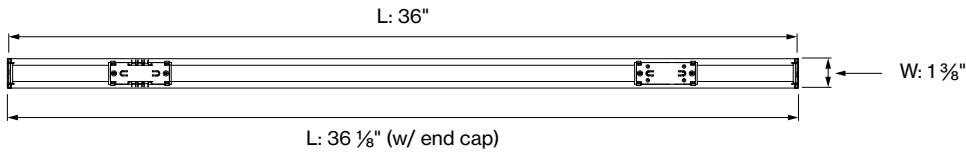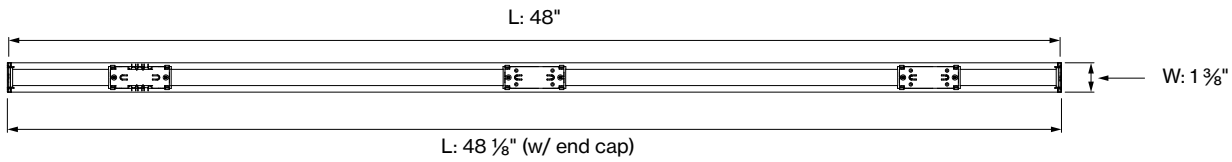

R-LINE mounting instructions

Get access to the R-LINE
mounting instructions faster by
scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/baso>

