


# R-LINE<sup>®</sup> LOUVER



## CERTIFICATIONS & COMPLIANCE

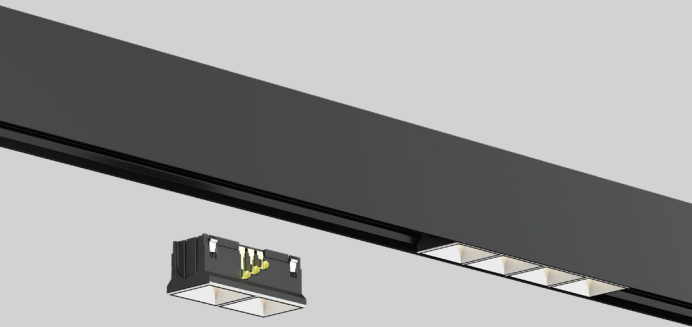


## FEATURES

**5 YEAR**  
limited  
led warranty

## CONFIGURATIONS



R1 Track  
1" Inset



R2 Track  
1" Inset



R2 Track  
2" Inset



R3 Track  
1" Inset


## REFLECTOR COLOR



Black



White



Chrome

## ADAPTER COLORS



Black



White

## Catalog Number Example

RLINS-LOUVER-1-BMBL-T2765-C90-48V-010V-TW-100LL-2.0WL-2CE

|   |   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|---|
| A | B | C | D | E | F | G | H | I | J | K |
|---|---|---|---|---|---|---|---|---|---|---|

### A SYSTEM

R-LINE R L I N S

### B PRODUCT

Louwer shallow inset L O U V E R

### C INSET HEIGHT

1" Inset flush with R1/R3 track 1  
2" Inset flush with R2 track 2

### D REFLECTOR COLOR

Black Matte B M \_ \_  
Black Gloss B G \_ \_  
White Matte W M \_ \_  
White Gloss W G \_ \_  
Chrome C H \_ \_

### E ADAPTER COLOR

Black \_ \_ B L  
White \_ \_ W H  
recommendation: adapter & track color should match

### F CCT/CRI

2700K / CRI >90 2 7 K - C 9 0  
3000K / CRI >90 3 0 K - C 9 0  
3500K / CRI >90 3 5 K - C 9 0  
4000K / CRI >90 4 0 K - C 9 0  
2700-6500K / CRI >90 T 2 7 6 5 - C 9 0  
1800-4000K / CRI >90 T 1 8 4 0 - C 9 0  
tunable white not compatible with 1-Cell Louver

### G VOLTAGE

48V low constant voltage 4 8 V  
remote driver required (see driver cutsheet)

### H DIMMING

0-10V 1% dimming 0 1 0 V

### I CIRCUIT

Static White 1 or 2 Circuit  
Tunable White (TW) T W  
tunable white not compatible with 1-Cell Louver

### J OUTPUT

100 lm/louwer 1 0 0 L L - 2.0WL  
2.0W/louwer

### K CELLS

1-Cell 100lm / 2.0w 1 C E  
2-Cell 200lm / 4.0w 2 C E  
4-Cell 400lm / 6.0w 4 C E  
tunable white not compatible with 1-Cell Louver

## Other Options

### + LINEAR OPAL

see R-Line Linear Opal cutsheet

### + CURVE OPAL

see R-Line Curve Opal cutsheet

### + SPOT

see R-Line Spot cutsheet

## LOUVER LENS

|                     | LOR  | LUMEN<br>MULTIPLIER | LUMEN PER<br>LOUVER | LUMEN PER<br>WATT |
|---------------------|------|---------------------|---------------------|-------------------|
| LOUVER Matte White  | 67.3 | 1                   | 100 lm/L            | 49-71 lm/W        |
| LOUVER Glossy White | 65.5 | 0.97                | 97 lm/L             | 49-71 lm/W        |
| LOUVER Matte Black  | 49.4 | 0.73                | 73lm/L              | 49-71 lm/W        |
| LOUVER Glossy Black | 49.1 | 0.73                | 73lm/L              | 49-71 lm/W        |
| LOUVER Chrome       | 65.4 | 0.97                | 97 lm/L             | 49-71 lm/W        |




Multiplier for direct lens ONLY

BASO  
basolighting.com

CS-V01

06/2025

DIMENSIONS

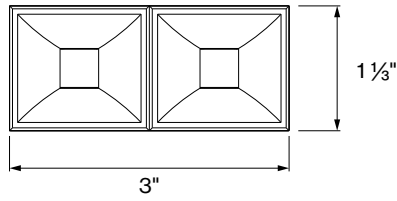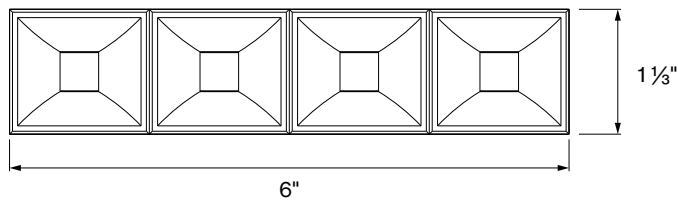

R-LINE mounting instructions

Get access to the R-LINE mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/baso>

