



CERTIFICATIONS & COMPLIANCE



FEATURES


5 YEAR
limited
led warranty

PERFORMANCE

• CRI > 90

INSET TYPE

SPHERE

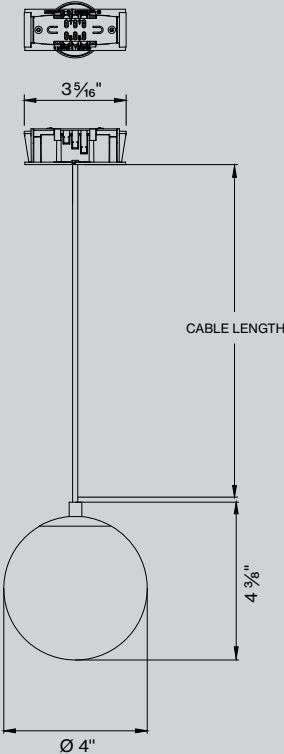

Catalog Number Example


RLINS-SPHERE-WH-BL-T2765-C90-48V-010V-TW-500LM-8W-DM-4IN-CBL-6IN

A	B	C	D	E	F	G	H	I	J	K
---	---	---	---	---	---	---	---	---	---	---

A SYSTEM R-LINE inset R L I N S	G DIMMING 0-10V 1% single control 0 1 0 V
B INSET TYPE SPHERE S P H E R E	H CIRCUIT Static White 1 or 2 Circuit * Tunable White (TW) T W *leave blank
C GLASS COLOR White (Opaque) W H _ _	I OUTPUT LM 500 lm 8W 5 0 0 L M - 8 W 750 lm 10W 7 5 0 L M - 1 0 W
D ADAPTER & CABLE COLOR sub option Black _ _ B L White _ _ W H	J SIZE 4" diameter D M - 4 I N
E CCT/CRI 2700K / CRI >90 2 7 K - C 9 0 3000K / CRI >90 3 0 K - C 9 0 3500K / CRI >90 3 5 K - C 9 0 4000K / CRI >90 4 0 K - C 9 0 2700-6500K / CRI >90 T 2 7 6 5 - C 9 0 1800-4000K / CRI >90 T 1 8 4 0 - C 9 0	K CABLE LENGTH 6" cable C B L - 6 I N 96" cable C B L - 9 6 I N Cable lengths available in 6" increments from 6" to 96".
F VOLTAGE 48V low constant voltage 4 8 V	

DIMENSIONS

SPHERE

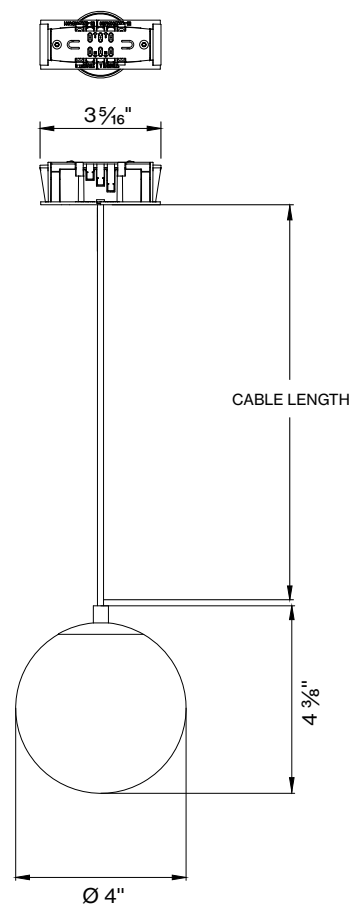

R-LINE mounting instructions

Get access to the R-LINE mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/baso>

