


R-LINE® SPOT 1.5




CERTIFICATIONS & COMPLIANCE

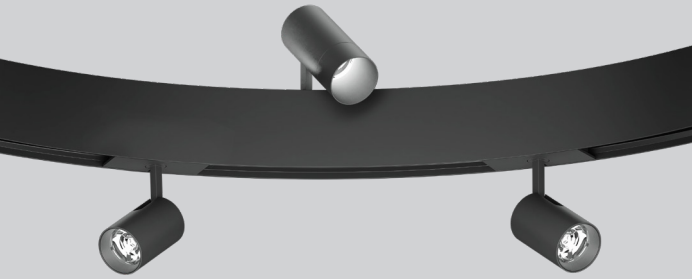


FEATURES

5 YEAR
limited
led warranty

CONFIGURATIONS



SPOT 1.5



BEAM ANGLE

SPOT 1.5



COLORS



Catalog Number Example

RLINS-SPOT1.5-BLBL-T2765-C90-48V-010V-TW-12D-500LM-8W

A	B	C	D	E	F	G	H	I
---	---	---	---	---	---	---	---	---

A SYSTEM

R-LINE R L I N S

B PRODUCT

Spot 1.5 S P O T 1 . 5

C COLOR HEAD

Black RAL9005 B L _ _
White RAL9016 W H _ _
Custom RAL X X _ _
custom RAL, please contact BASO

ADAPTER COLOR sub option

Black _ _ B L
White _ _ W H
recommendation: adapter & track color should match

D CCT/CRI

2700K / CRI >90 2 7 K - C 9 0
3000K / CRI >90 3 0 K - C 9 0
3500K / CRI >90 3 5 K - C 9 0
4000K / CRI >90 4 0 K - C 9 0

E VOLTAGE

48V low constant voltage 4 8 V
remote driver required (see driver cutsheet)

F DIMMING

0-10V 1% dimming 0 1 0 V

G CIRCUIT

Static White 1 or 2 Circuit *
Tunable White (TW) T W
*leave blank

H BEAM ANGLE Spot 1.5

12° spot 1 2 D
21° medium 2 1 D
35° flood 3 5 D
58° ultra wide flood 5 8 D

I OUTPUT SPOT 1.5

500 lm 8w 5 0 0 LM - 8 W
750 lm 11w 7 5 0 LM - 11 W
1000 lm 15w 1 0 0 0 LM - 15 W

Accessories

ships pre-assembled

J FILTER

No Filter *
Hex Louver H L
Solite Filter S F
*leave blank

K SNOOT

Standard Short Snoot *
Anti Glare Snoot 1" S N
*leave blank

Optional Accessories

ships separately

L ADAPTER COVER

ship standard with straight cover (field changeable)

Curved R18" R 1 8
Curved R24" R 2 4
Curved R36" R 3 6
Straight S T R

M LENS

Set Extra Lenses all beam spreads E X

Other Options

+ LINEAR OPAL

see R-Line Linear cutsheet

+ CURVE OPAL

see R-Line Curve Opal cutsheet

+ LOUVER

see R-Line Louver cutsheet

BASO
basolighting.com

CS-V01

06/2025

5 YEAR
limited
led warranty

R1 Track **R2 Track** **R3 Track**

SPOT 1.5

30° 40° 60°

RLINS-SPOT1.5-BLBL-T2765-C90-48V-010V-TW-30D-500LM-8W

R-LINE RLINS

Spot 1.5 SPOT 1.5

Black RAL9005	B L _ _
White RAL9016	WH _ _
Custom RAL	X X _ _

custom RAL, please contact BASO

Black	— —	B L
White	— —	W H

recommendation: adapter & track color should match

2700-6500K / CRI >90 T 2 7 6 5 - C 9 0
1800-4000K / CRI >90 T 1 8 4 0 - C 9 0

48V low constant voltage	48V
remote driver required (see driver cutsheet)	

0-10V 1% dimming 0 1 0 V

Static White 1 or 2 Circuit	*
Tunable White (TW)	TW
*leave blank	

30° medium	30 D
40° flood	40 D
60° ultra wide flood	60 D

500 lm 8W	500LM- 8W
750 lm 11W	750LM- 11W

ships pre-assembled

No Filter	*
Hex Louver	H L
Solite Filter	S F

*leave blank

Standard Short Snoot	*
Anti Glare Snoot 1"	S N

ships separately

ship standard with straight cover (field changeable)

Curved R18"	R 1 8
Curved R24"	R 2 4
Curved R36"	R 3 6
Straight	S T R

Set Extra Lenses all beam spreads E X


see R-Line Linear cutsheet

see R-Line Curve Opal cutsheet


see R-Line Louver cutsheet

DIMENSIONS

SPOT 1.5

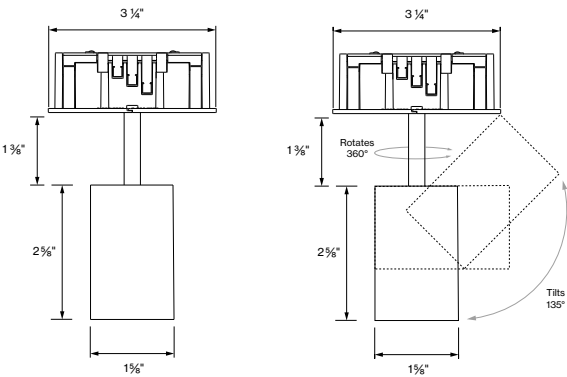

OPTIONS

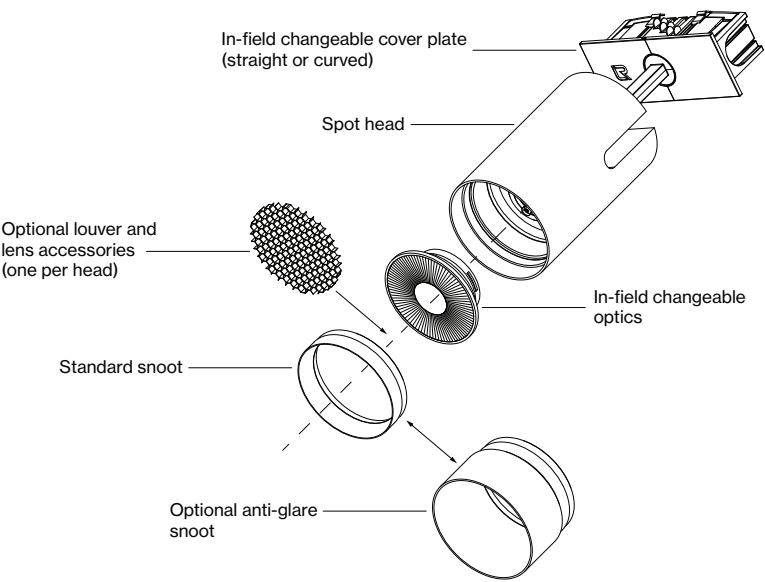

R-LINE mounting instructions

Get access to the R-LINE mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/baso>



Declare.

R-LINE SPOT
BASO Inc.

Final Assembly: Oxford, Connecticut, USA
Life Expectancy: 7 Years
End of Life Options: Recyclable (80%), Landfill (20%)

Ingredients:
Aluminum, Small electrical components, Zinc, Steel, Insulation, Glue, Plastic, Copper

LBC Temp Exception: RE-002 - Small Electrical Components

Living Building Challenge Criteria: Compliant

RED LIST	% Discarded: 100% at 100ppm
■ LBC Red List Free	100%
■ LBC Red List Approved	100%
□ Declared	0%
□ Not Discarded	0%
□ Not Discarded	0%

Baso-0004
Expiry Date: 06/2025
Original Issue Date: 2024

INTERNATIONAL LIVING FUTURE INSTITUTE™ livingfutureinstitute.com