

R-LINE® SPOT 2.0




CERTIFICATIONS & COMPLIANCE




FEATURES

5 YEAR
limited
led warranty

CONFIGURATIONS



SPOT 2.0



BEAM ANGLE



COLORS



Catalog Number Example

RLINS-SPOT2.0-BLBL-T2765-C90-48V-010V-TW-12D-1000LM-10W

A	B	C	D	E	F	G	H	I
---	---	---	---	---	---	---	---	---

A SYSTEM

R-LINE R L I N S

B PRODUCT

Spot 2.0 S P O T 2 . 0

C COLOR HEAD

Black RAL9005	B L _ _
White RAL9016	W H _ _
Custom RAL	X X _ _

custom RAL, please contact BASO

ADAPTER COLOR sub option

Black	_ _ B L
White	_ _ W H

recommendation: adapter & track color should match

D CCT/CRI

2700K / CRI >90	2 7 K - C 9 0
3000K / CRI >90	3 0 K - C 9 0
3500K / CRI >90	3 5 K - C 9 0
4000K / CRI >90	4 0 K - C 9 0

E VOLTAGE

48V low constant voltage	4 8 V
--------------------------	-------

remote driver required (see driver cutsheet)

F DIMMING

0-10V 1% dimming	0 1 0 V
------------------	---------

H CIRCUIT

Static White 1 or 2 Circuit	*
Tunable White (TW)	T W

*leave blank

H BEAM ANGLE Spot 2.0

12° spot	1 2 D
24° medium	2 4 D
38° flood	3 8 D
45° wide flood	4 5 D
60° ultra wide flood	6 0 D

I OUTPUT SPOT 2.0

1000 lm 10W	1 0 0 0 LM - 10W
1500 lm 20W	1 5 0 0 LM - 20W
2000 lm 24W	2 0 0 0 LM - 24W

Accessories

ships pre-assembled

J FILTER

No Filter	*
Hex Louver	H L
Solite Filter	S F

*leave blank

K SNOOT

Standard Short Snoot	*
Anti Glare Snoot 1"	S N

*leave blank

Optional Accessories

ships separately

L ADAPTER COVER

ship standard with straight cover (field changeable)

Curved R18"	R 1 8
Curved R24"	R 2 4
Curved R36"	R 3 6
Straight	S T R

M LENS

Set Extra Lenses all beam spreads	E X
-----------------------------------	-----

Other Options

+ LINEAR OPAL

see R-Line Linear cutsheet

+ CURVE OPAL

see R-Line Curve Opal cutsheet

+ LOUVER

see R-Line Louver cutsheet

BASO
basolighting.com

CS-V01

06/2025

R-LINE®

SPOT 2.0 (TUNABLE WHITE)




CERTIFICATIONS & COMPLIANCE




FEATURES

5 YEAR
limited
led warranty

CONFIGURATIONS



SPOT 2.0



BEAM ANGLE



COLORS



Catalog Number Example

RLINS-SPOT2.0-BLBL-T2765-C90-48V-010V-TW-30D-1000LM-10W

A B C D E F G H I

A SYSTEM

R-LINE R L I N S

B PRODUCT

Spot 2.0 S P O T 2 . 0

C COLOR HEAD

Black RAL9005 B L _ _
White RAL9016 W H _ _
Custom RAL X X _ _
custom RAL, please contact BASO

ADAPTER COLOR sub option

Black _ _ B L
White _ _ W H
recommendation: adapter & track color should match

D CCT/CRI

2700-6500K / CRI >90 T 2 7 6 5 - C 9 0
1800-4000K / CRI >90 T 1 8 4 0 - C 9 0

E VOLTAGE

48V low constant voltage 4 8 V
remote driver required (see driver cutsheet)

F DIMMING

0-10V 1% dimming 0 1 0 V

H CIRCUIT

Static White 1 or 2 Circuit *
Tunable White (TW) T W
*leave blank

H BEAM ANGLE Spot 2.0

30° medium 3 0 D
40° flood 4 0 D
60° ultra wide flood 6 0 D

I OUTPUT SPOT 2.0

1000 lm 12W 1 0 0 0 LM - 12W
1500 lm 20W 1 5 0 0 LM - 20W

Accessories

ships pre-assembled

J FILTER

No Filter *
Hex Louver H L
Solite Filter S F
*leave blank

K SNOOT

Standard Short Snoot *
Anti Glare Snoot 1" S N
*leave blank

Optional Accessories

ships separately

L ADAPTER COVER

ship standard with straight cover (field changeable)

Curved R18" R 1 8
Curved R24" R 2 4
Curved R36" R 3 6
Straight S T R

M LENS

Set Extra Lenses all beam spreads E X

Other Options

+ LINEAR OPAL

see R-Line Linear cutsheet

+ CURVE OPAL

see R-Line Curve Opal cutsheet

+ LOUVER

see R-Line Louver cutsheet


BASO
basolighting.com

CS-V01


06/2025

DIMENSIONS

SPOT 2.0

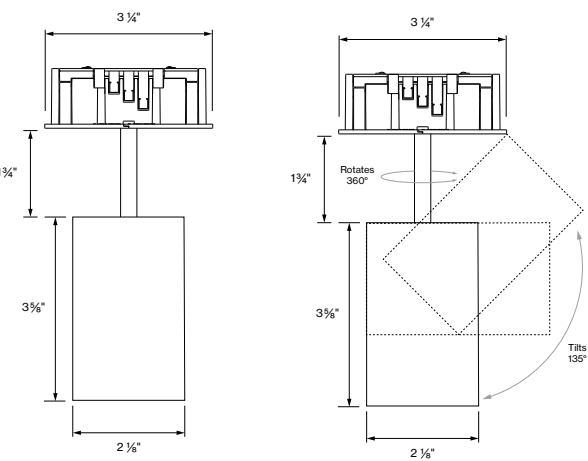

OPTIONS

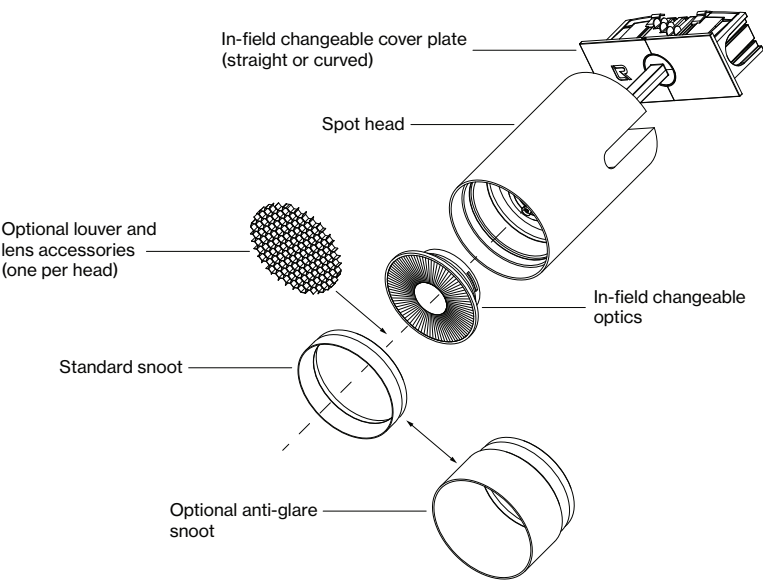

R-LINE mounting instructions

Get access to the R-LINE mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/baso>



Declare.

R-LINE SPOT
BASO Inc.

Final Assembly: Oxford, Connecticut, USA
Life Expectancy: 7 Years
End of Life Options: Recyclable (80%), Landfill (20%)

Ingredients:
Aluminum, Small electrical components, Zinc, Steel, Manufacture, Chemicals, Coatings

ULC Temp Exception RE-002 - Small Electrical Components

Living Building Challenge Criteria: Compliant

H3 Red List:
ULC Red List Free
ULC Red List Approved
VOC Content Not Applicable
Declared
H3 Responsible Sourcing Not Applicable

% Disclosed: 100% at 100ppm
VOC Content Not Applicable
Declared
H3 Responsible Sourcing Not Applicable

BAS-0004
ENR 05 AUG 2025
Original Issue Date: 2024

INTERNATIONAL LIVING FUTURE INSTITUTE™ <http://livingfutureinstitute.com>