

R-LINE® SQUARE



CERTIFICATIONS & COMPLIANCE



FEATURES



5 YEAR
limited
led warranty

PERFORMANCE

- Decorative pendant shapes
- CRI > 90

INSET TYPE

SQUARE

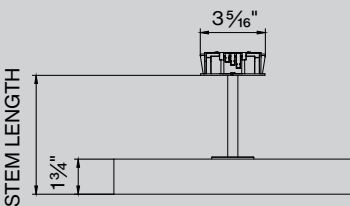

Catalog Number Example

RLINS-SQUARE-BLBL-T2765-C90-48V-010V-TW-1000LM-10W-1FTx1FT-STM-6IN

A	B	C	D	E	F	G	H	I	J
---	---	---	---	---	---	---	---	---	---

A SYSTEM

R-LINE R L I N S

B PRODUCT

SQUARE S Q U A R E

C HOUSING COLOR

Black RAL9005 B L _ _
White RAL9016 W H _ _

ADAPTER & STEM COLOR sub option

Black _ _ B L
White _ _ W H

recommendation: adapter & track color should match

D CCT/CRI

2700K / CRI >90 2 7 K - C 9 0
3000K / CRI >90 3 0 K - C 9 0
3500K / CRI >90 3 5 K - C 9 0
4000K / CRI >90 4 0 K - C 9 0
2700-6500K / CRI >90 T 2 7 6 5 - C 9 0
1800-4000K / CRI >90 T 1 8 4 0 - C 9 0

E VOLTAGE

48V low constant voltage 4 8 V
remote driver required (see driver cutsheet)

F DIMMING

0-10V 1% dimming 0 1 0 V

G CIRCUIT

Static White 1 or 2 Circuit *
Tunable White (TW) T W
*leave blank

H OUTPUT

500 lm 5W 5 0 0 L M - 5 W
1000 lm 10W 1 0 0 0 L M - 1 0 W

I SIZE

1' square 1 F T x 1 F T

J STEM LENGTH*

6" stem S T M - 6 I N
96" stem S T M - 9 6 I N
Custom Stem X X X I N

*Stem lengths available in 6" increments from 6" to 96".
Stems are not field-cuttable.



K ADAPTER COVER

ship standard with straight cover (field changeable)

Curved R18" R 1 8
Curved R24" R 2 4
Curved R36" R 3 6
Straight S T R

DIMENSIONS

SQUARE

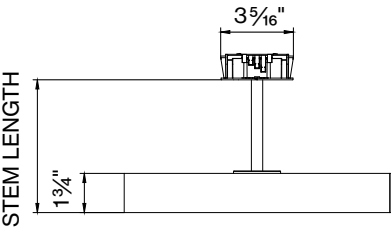

R-LINE mounting instructions

Get access to the R-LINE mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/baso>

