

# R-LINE<sup>®</sup> TUBE



## CERTIFICATIONS & COMPLIANCE



## FEATURES


**5** YEAR  
limited  
led warranty

## PERFORMANCE


- CRI > 90

## INSET TYPE

TUBE R1/R3

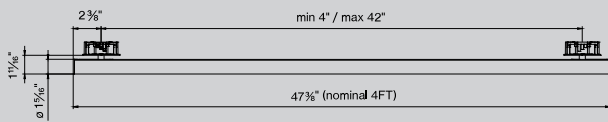

TUBE R2

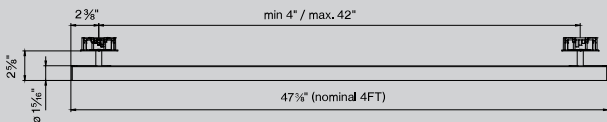

## Catalog Number Example

RLINS-TUBE-1-BLBL-T2765-C90-48V-010V-TW-0600LF-01FT

A B C D E F G H I J

### A SYSTEM

R-LINE inset R L I N S

### B INSET TYPE

TUBE T U B E

### C INSET HEIGHT

R1/R3 Inset 1  
R2 Inset 2

### D ENDCAP COLOR

Black RAL9005 B L \_ \_  
White RAL9016 W H \_ \_

### ADAPTER & STEM COLOR

sub option

Black \_ \_ B L  
White \_ \_ W H

### E CCT/CRI

2700K / CRI >90 2 7 K - C 9 0  
3000K / CRI >90 3 0 K - C 9 0  
3500K / CRI >90 3 5 K - C 9 0  
4000K / CRI >90 4 0 K - C 9 0  
2700-6500K / CRI >90 coming soon  
1800-4000K / CRI >90 coming soon

### F VOLTAGE

48V low constant voltage 4 8 V

### G DIMMING

0-10V 1% single control 0 1 0 V

### H CIRCUIT

Static White 1 or 2 Circuit \*  
Tunable White (TW) T W  
\*leave blank

### I OUTPUT LM

300 lm/ft 100% 0 3 0 0 L F  
600 lm/ft 100% 0 6 0 0 L F

### J DIMENSIONS IN FT

1 FT 0 1 F T  
2 FT 0 2 F T  
3 FT 0 3 F T  
4 FT 0 4 F T

## Optional Accessories

ships separately


### K ADAPTER COVER

ship standard with straight cover (field changeable)

Curved R18" R 1 8  
Curved R24" R 2 4  
Curved R36" R 3 6  
Straight S T R


DIMENSIONS

TUBE 1

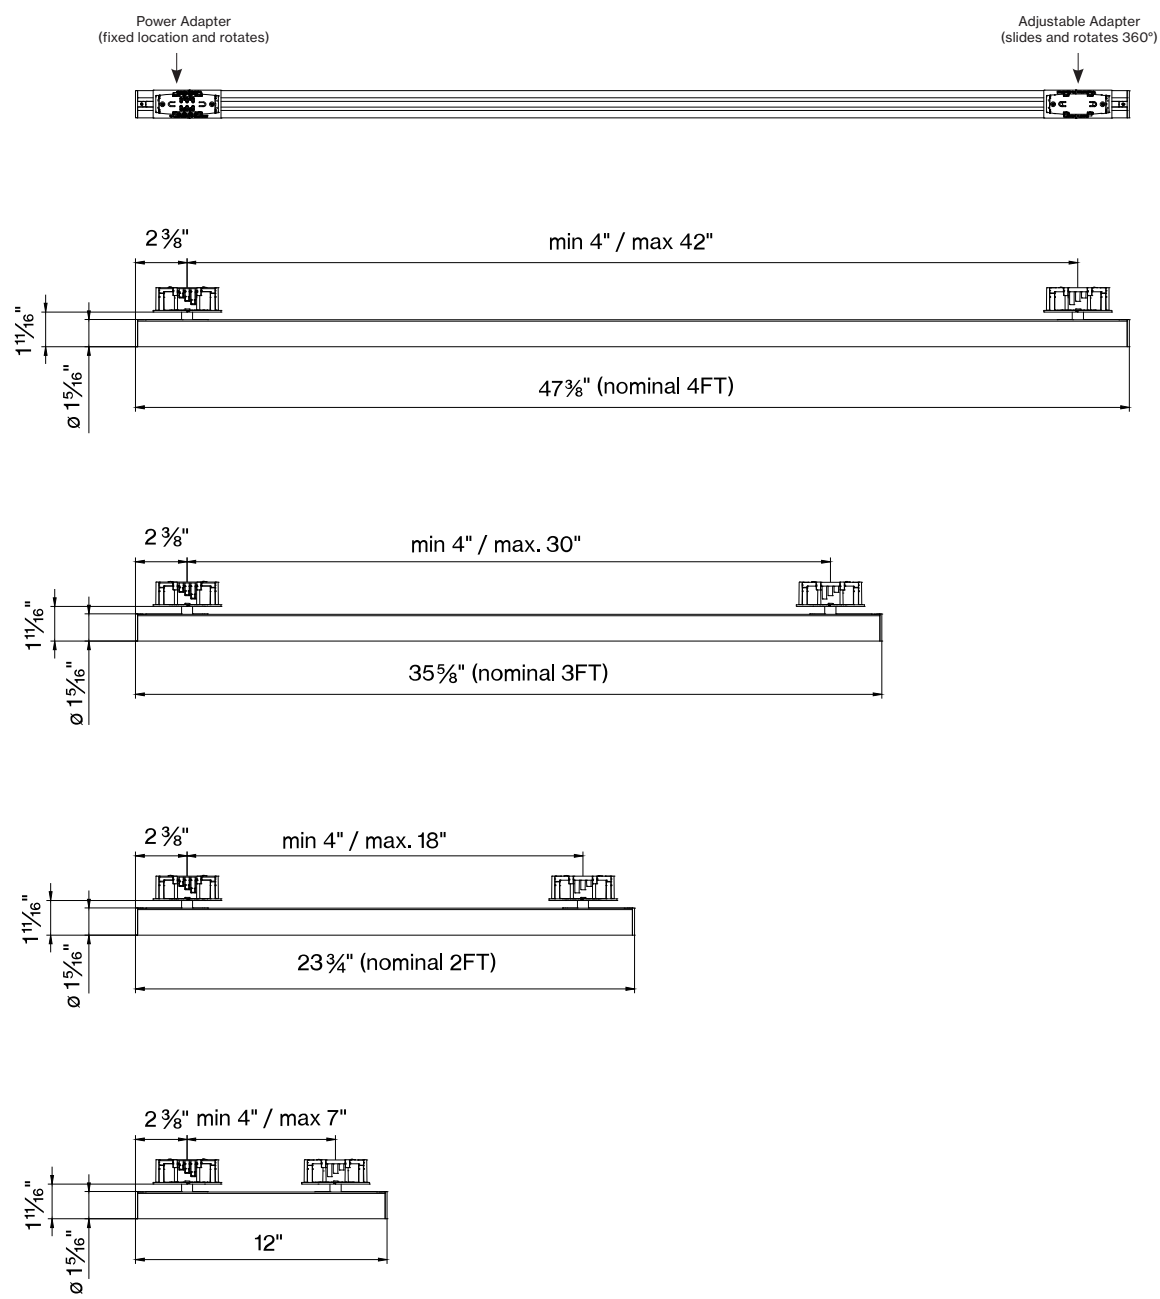

DIMENSIONS

TUBE R2 Track

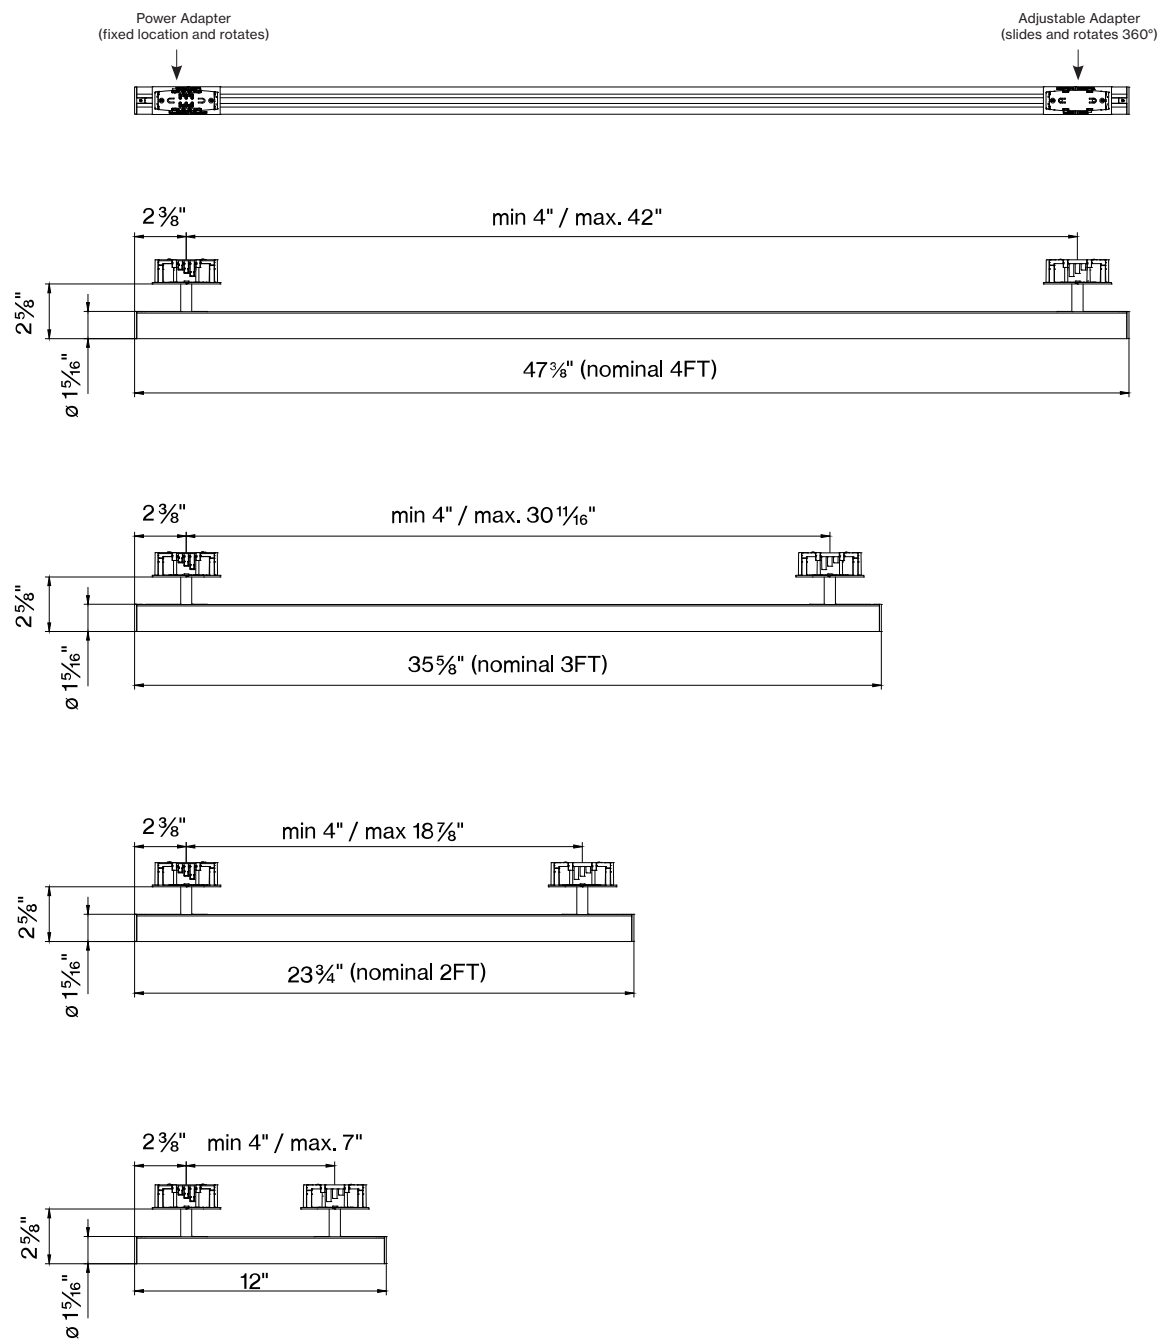

R-LINE mounting instructions

Get access to the R-LINE mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/baso>

