

R-LINE®

TULIP



CERTIFICATIONS & COMPLIANCE



FEATURES


5 YEAR
limited
led warranty

PERFORMANCE

• CRI > 90

INSET TYPE

TULIP

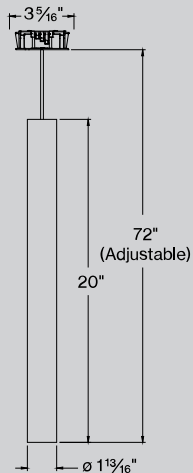

Catalog Number Example

RLINS-TULIP-BLBL-T2765-C90-48V-010V-TW-500LM-5W

A	B	C	D	E	F	G	H
---	---	---	---	---	---	---	---

A SYSTEM

R-LINE inset R L I N S

B INSET TYPE

TULIP T U L I P
flood 37°

for specific stem/cable lengths, please
contact customer service

C HOUSING COLOR

Black RAL9005 B L _ _
White RAL9016 W H _ _

ADAPTER & CABLE COLOR

sub option

Black _ _ B L
White _ _ W H

D CCT/CRI

2700K / CRI >90 2 7 K - C 9 0
3000K / CRI >90 3 0 K - C 9 0
3500K / CRI >90 3 5 K - C 9 0
4000K / CRI >90 4 0 K - C 9 0
2700-6500K / CRI >90 T 2 7 6 5 - C 9 0
1800-4000K / CRI >90 T 1 8 4 0 - C 9 0

E VOLTAGE

48V low constant voltage 4 8 V

F DIMMING

0-10V 1% single control 0 1 0 V

G CIRCUIT

Static White 1 or 2 Circuit *
Tunable White (TW) T W
*leave blank

H OUTPUT LM

500 lm 5W 5 0 0 L M - 8 W
1000 lm 10W 1 0 0 0 L M - 15 W

Optional Accessories

ships separately

I ADAPTER COVER

ship standard with straight cover (field
changeable)


Curved R18" R 1 8
Curved R24" R 2 4
Curved R36" R 3 6
Straight S T R

J FILTER

No Filter *
Hex Louver H L
Solite Filter S F
*leave blank

DIMENSIONS

TULIP

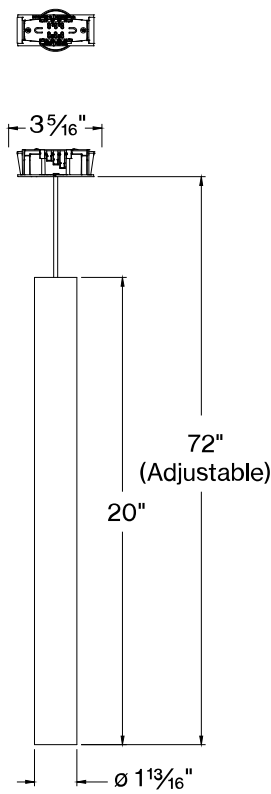

R-LINE mounting instructions

Get access to the R-LINE mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/baso>

