

SPOT 1.5




CERTIFICATIONS & COMPLIANCE



FEATURES


5 YEAR
limited
led warranty

SPOT 1.5



BEAM ANGLE

SPOT 1.5



COLORS



Catalog Number Example

SPOT1.5-SUR-BLBL-30K-C90-21D-UNV-010V-1000LM-15W-STM-2IN

A	B	C	D	E	F	G	H	I	L
---	---	---	---	---	---	---	---	---	---

A RANGE

SPOT 1.5 SPOT 1.5

B MOUNTING

Surface SUR

C COLOR HEAD

Black RAL9005 BL _ _
White RAL9016 WH _ _
Custom RAL XX _ _
custom RAL, please contact BASO

D COLOR STEM & CANOPY COVER

Black _ _ BL
White _ _ WH
recommendation: adapter & track color should match

E CCT/CRI

2700K / CRI >90 27K - C90
3000K / CRI >90 30K - C90
3500K / CRI >90 35K - C90
4000K / CRI >90 40K - C90

F BEAM ANGLE Spot 1.5

12° spot 12D
21° medium 21D
35° flood 35D
58° ultra wide flood 58D

G VOLTAGE

120V / 277V UNV

H DIMMING

0-10V 1% dimming 010V
Lutron EcoSystem
Quantum, Vive, GRAFIK Eye, Home- LDE1
Works
Power over ethernet
consult customer service for POEC
compatibility
For custom dimming protocol, please contact
customer service

I OUTPUT SPOT 1.5

500 lm 8W 500LM - 8W
750 lm 11W 750LM - 12W
1000 lm 15W 1000LM - 15W

Accessories

ships pre-assembled

J FILTER

No Filter *
Hex Louver HL
Solite Filter SF
*leave blank

K SNOOT

Standard Short Snoot *
Anti Glare Snoot 1" SN
*leave blank

L STEM LENGTH

2" stem STM - 2IN
6" stem STM - 6IN
9" stem STM - 9IN
Custom stem XXIN

M CANOPY TYPE

Flat canopy FTCA

SPOT 1.5

TUNABLE WHITE




CERTIFICATIONS & COMPLIANCE



FEATURES

5 YEAR
limited
led warranty

SPOT 1.5



BEAM ANGLE

SPOT 1.5



COLORS



Catalog Number Example

SPOT1.5-SUR-BLBL-T2765-C90-30D-UNV-010V-1000LM-15W-STM-2IN

A	B	C	D	E	F	G	H	I	L
---	---	---	---	---	---	---	---	---	---

A RANGE

SPOT 1.5 SPOT 1.5

I OUTPUT SPOT 1.5

500 lm 8W 5 0 0 LM - 8W
750 lm 11W 7 5 0 LM - 11W

B MOUNTING

Surface SUR

Accessories

ships pre-assembled

C COLOR HEAD

Black RAL9005 BL _ _
White RAL9016 WH _ _
Custom RAL XX _ _
custom RAL, please contact BASO

J FILTER

No Filter *
Hex Louver HL
Solite Filter SF
*leave blank

D COLOR STEM & CANOPY COVER

Black _ _ BL
White _ _ WH
recommendation: adapter & track color should match

K SNOOT

Standard Short Snoot *
Anti Glare Snoot 1" SN
*leave blank

E CCT/CRI

2700-6500K / CRI >90 T 2 7 6 5 - C 9 0
1800-4000K / CRI >90 T 1 8 4 0 - C 9 0

L STEM LENGTH

2" stem STM - 2 I N
6" stem STM - 6 I N
9" stem STM - 9 I N
Custom stem XX I N

F BEAM ANGLE Spot 1.5

30° medium 3 0 D
40° flood 4 0 D
60° ultra wide flood 6 0 D

M CANOPY TYPE

Flat canopy F T C A

G VOLTAGE


120V / 277V UNV

H DIMMING

0-10V 1% dimming 0 1 0 V
Lutron EcoSystem
Quantum, Vive, GRAFIK Eye, Home- L D E 1 Works
Power over ethernet
consult customer service for compatibility POEC
For custom dimming protocol, please contact customer service

DIMENSIONS

SPOT 1.5

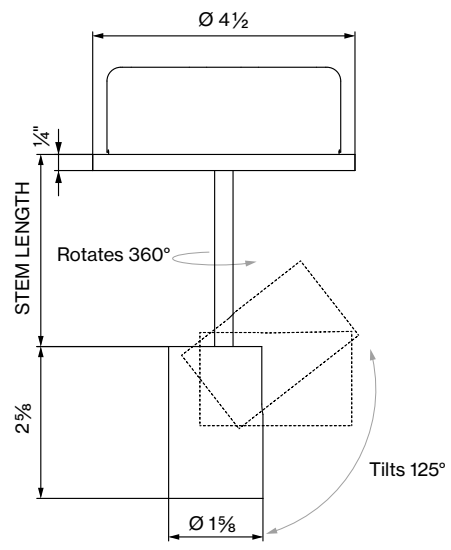

OPTIONS

