

SPOT 2.0




CERTIFICATIONS & COMPLIANCE



FEATURES

5 YEAR
limited
led warranty

SPOT 2.0



BEAM ANGLE

SPOT 2.0



COLORS



Catalog Number Example

SPOT2.0-SUR-BLBL-30K-C90-21D-UNV-010V-1500LM-23W-STM-2IN

A	B	C	D	E	F	G	H	I	L
---	---	---	---	---	---	---	---	---	---

A RANGE

SPOT 2.0 SPOT 2.0

B MOUNTING

Surface SUR

C COLOR HEAD

Black RAL9005 BL _ _
White RAL9016 WH _ _
Custom RAL XX _ _
custom RAL, please contact BASO

D COLOR STEM & CANOPY COVER

Black _ _ BL
White _ _ WH
recommendation: adapter & track color should match

E CCT/CRI

2700K / CRI >90 27K - C90
3000K / CRI >90 30K - C90
3500K / CRI >90 35K - C90
4000K / CRI >90 40K - C90

F BEAM ANGLE Spot 1.5

12° spot 12D
21° medium 24D
35° flood 38D
58° ultra wide flood 58D

G VOLTAGE

120V / 277V UNV

H DIMMING

0-10V 1% dimming 010V
Lutron EcoSystem
Quantum, Vive, GRAFIK Eye, Home- LDE 1 Works
Power over ethernet
consult customer service for
compatibility POEC
For custom dimming protocol, please contact
customer service

I OUTPUT SPOT 2.0

1000 lm 8W 1000LM - 12W
1500 lm 11W 1500LM - 23W
2000 lm 15W 2000LM - 27W

Accessories

ships pre-assembled

J FILTER

No Filter *
Hex Louver HL
Solite Filter SF
*leave blank

K SNOOT

Standard Short Snoot *
Anti Glare Snoot 1" SN
*leave blank

L STEM LENGTH

2" stem STM - 2IN
6" stem STM - 6IN
9" stem STM - 9IN
Custom stem XXIN

M CANOPY TYPE

Flat canopy FTCA

SPOT 2.0

TUNABLE WHITE




CERTIFICATIONS & COMPLIANCE



FEATURES

5 YEAR
limited
led warranty

SPOT 2.0



BEAM ANGLE

SPOT 2.0



COLORS



Catalog Number Example

SPOT2.0-SUR-BLBL-T2765-C90-30D-UNV-010V-1500LM-23W-STM-2IN

A	B	C	D	E	F	G	H	I	L
---	---	---	---	---	---	---	---	---	---

A RANGE

SPOT 2.0 SPOT 2.0

B MOUNTING

Surface SUR

C COLOR HEAD

Black RAL9005 BL _ _
White RAL9016 WH _ _
Custom RAL XX _ _
custom RAL, please contact BASO

D COLOR STEM & CANOPY COVER

Black _ _ BL
White _ _ WH
recommendation: adapter & track color should match

E CCT/CRI

2700-6500K / CRI >90 T 2 7 6 5 - C 9 0
1800-4000K / CRI >90 T 1 8 4 0 - C 9 0

F BEAM ANGLE Spot 1.5

30° medium 3 0 D
40° flood 4 0 D
60° ultra wide flood 6 0 D

G VOLTAGE

120V / 277V UNV

H DIMMING

0-10V 1% dimming 0 1 0 V

Lutron EcoSystem
Quantum, Vive, GRAFIK Eye, Home- L D E 1
Works

Power over ethernet
consult customer service for POEC
compatibility

For custom dimming protocol, please contact
customer service

I OUTPUT SPOT 2.0

1000 lm 12W 1 0 0 0 LM - 12W
1500 lm 20W 1 5 0 0 LM - 20W

Accessories

ships pre-assembled

J FILTER

No Filter *
Hex Louver H L
Solite Filter S F
*leave blank

K SNOOT

Standard Short Snoot *
Anti Glare Snoot 1" S N
*leave blank

L STEM LENGTH


2" stem STM - 2 I N
6" stem STM - 6 I N
9" stem STM - 9 I N
Custom stem X X I N

M CANOPY TYPE

Flat canopy F T C A

DIMENSIONS

SPOT 2.0

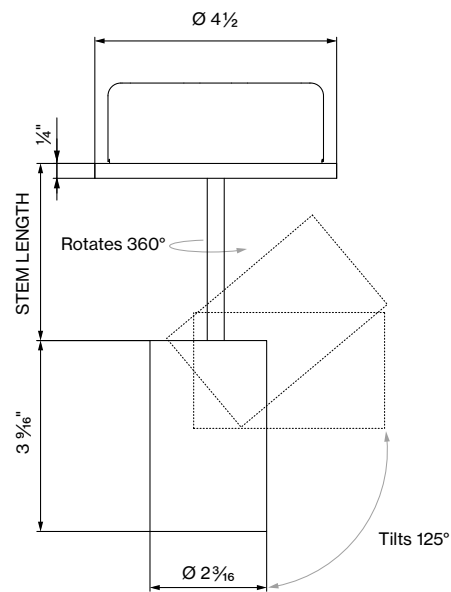

OPTIONS

