
R-LINE®
CIRCLE
DIRECT / INDIRECT




5 YEAR limited led warranty

MOUNTING

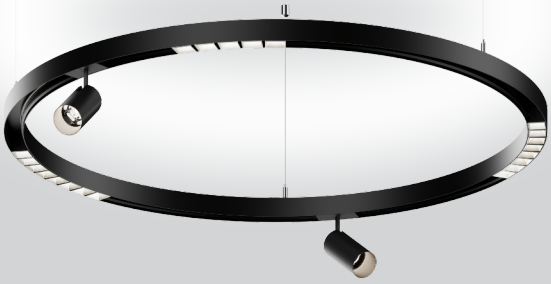

Indirect
Suspended

PERFORMANCE



- 350 – 700 lm/ft uplight
- Diameter from 36 to 240 IN
- Modular 48V track system
- R1 and R2 channel
- Patented technology
- Opal and batwing uplight option
- Customizable


COMPATIBLE CONTROLS & FEATURES

ATHENA WIRELESS NODE by LUTRON · nLIGHT · SENSOR READY · consult factory

CERTIFICATIONS & COMPLIANCE

cULus · RoHS compliant · TITLE 24 JA8

DIMENSIONS



Catalog Number Example

RLTR-R1-PDT-BLBL-27K-C90-OP-48V-010V-LUTA-1C-700LF-DM-36IN

A B C D E F G H I J

A RANGE

R1 Track 1" track	RLTR-R1
R2 Track 2" track	RLTR-R2

B MOUNTING

Pendant Cable	PDT
Custom Mount	XXX

custom mount, please contact BASO

C HOUSING COLOR

Black RAL9005	BL__
White RAL9016	WH__
Custom RAL	XX__

custom RAL, please contact BASO

PENDANT HARDWARE COLOR

sub option

Black	__BL
White	__WH

power feed, stem & canopy cover only;
AC cable & barrel mount come in silver

D CCT/CRI

2700K / CRI >90	27K-C90
3000K / CRI >90	30K-C90
3500K / CRI >90	35K-C90
4000K / CRI >90	40K-C90
1800-4000K Tunable White	T1840-C90
2700-6500K Tunable White	T2765-C90

E UPLIGHT LENS

Opal	OP
Batwing	BW

batwing not available in tunable white

VOLTAGE

48V low constant voltage	48V

remote driver required (see driver cutsheet)

F DIMMING

0-10V 1 % dimming	010V
DALI	DALI

G CONTROLS

No Controls	*
Lutron Athena compatible	LUTA
nLight compatible	NLT
Integrated Sensor consult factory	SEN
Custom Controls consult factory	XXXX

*leave blank

H CIRCUIT

1 Circuit	1C
2 Circuit	2C

I UPLIGHT OUTPUT

350 lm/ft 4W	350LF
700 lm/ft 8W	700LF

J DIAMETER IN INCHES


Ø 36"	DM-36IN
Ø 48"	DM-48IN
Ø 60"	DM-60IN
Ø 72"	DM-72IN
Ø 96"	DM-96IN
Ø 120"	DM-120IN
Ø 240"	DM-240IN
Custom diameters	DM-XXXIN

for custom diameters, contact BASO


BASO
basolighting.com

DIMENSIONS

R1




R2




POWER TRACK CIRCUITRY

R1/R2

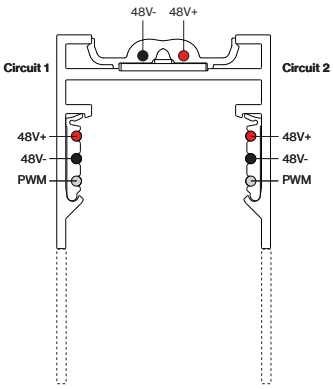


CIRCUIT DIAGRAM

Single Circuit with Uplight
(With options to control together)

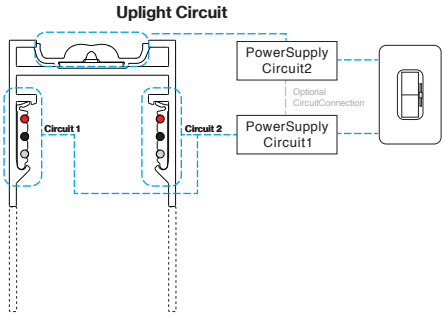


Two Circuit w/ Uplight

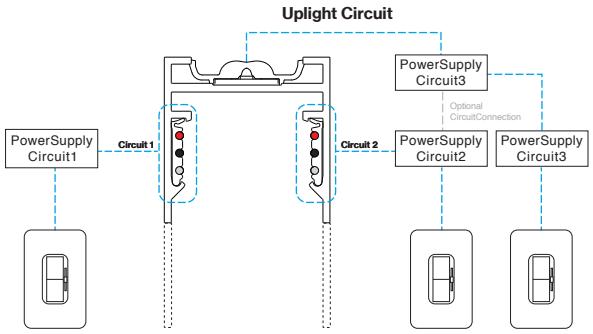


SYSTEM COMPONENTS (SIDE VIEW)

R1/R2 PDT W/ UPLIGHT

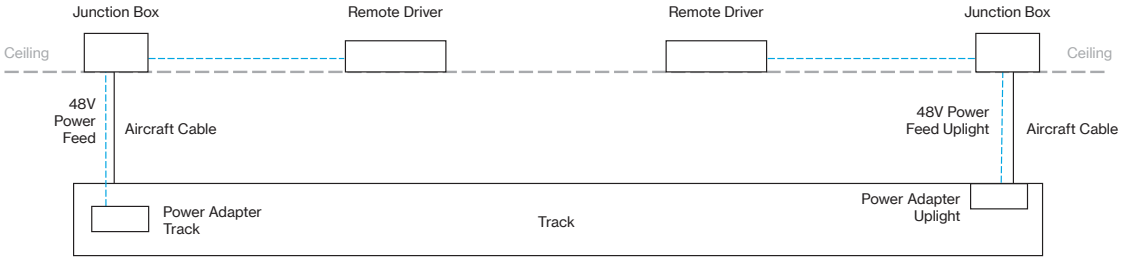

TRACK DIAGRAM (SIDE VIEW)

R1/R2 PDT

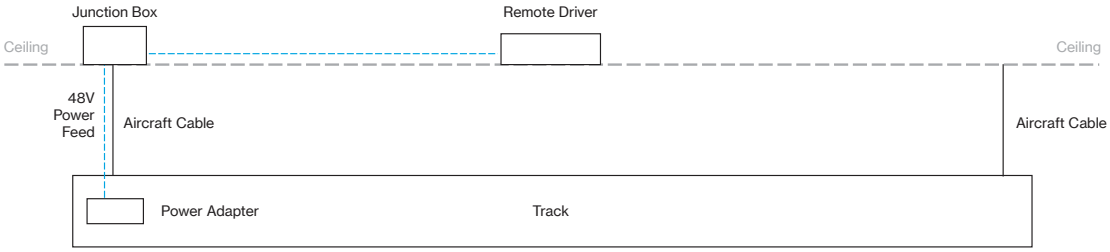

R-LINE mounting instructions

Get access to the R-LINE mounting instructions faster by scanning the QR code.

https://www.basolighting.com/resources/mounting-instructions/baso

