PANO 2"
WOODWORKS® GRILLE FORTÉ

5 YEAR limited led warranty

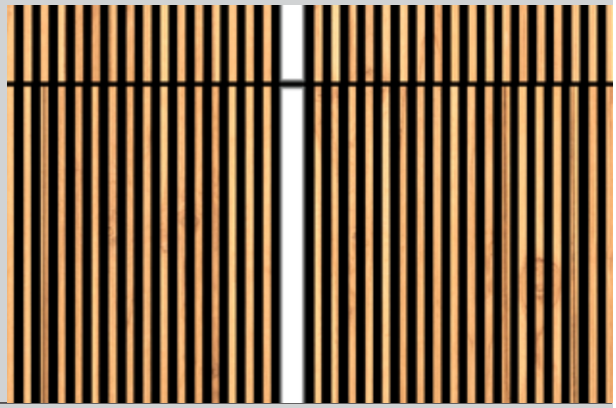

MOUNTING
Quick and easy electrical connection

REMOTE MOUNTING

PERFORMANCE
- Up to 122lm/W
- Coordinates with Woodworks® Grille Forte ceiling panel
- High performance opal cover
- Remote mountable LED driver
- Damp rated
- Customizable



COMPATIBLE CONTROLS & FEATURES

ATHENA WIRELESS NODE by LUTRON · nLIGHT · SENSOR READY · consult factory

CERTIFICATIONS & COMPLIANCE

cULus · RoHS compliant · Declare. RedList Approved

DIMENSIONS



Catalog Number Example

PANO2-WGF-BL-PS-OP-27K-C80-UNV-010V-0300LF-ST-04FT

A B C D E F G H I J L M

A RANGE

PANO 2"	PANO2

B CEILING TYPE

WoodWorks® Grille Forte	WGF

C COLOR

White	WH
Black	BL

D POWER FEED LENGTH

4' standard integrated	PS
10' medium remote option	PM
30'long remote option	PL

power feed distance denotes secondary wiring from detachable driver box to fixture; driver box comes with a 6 ft conduit for primary wiring

E LENS

HP opal cover	OP

F CCT

2700K	27K
3000K	30K
3500K	35K
4000K	40K
Custom CCT	XXK

G CRI

CRI > 80	C80
CRI > 90	C90

H VOLTAGE

120V / 277V	UNV

I DIMMING

0-10V 1%	010V
Lutron EcoSystem Quantum, Vive, GRAFIK Eye, HomeWorks	LES1
Power over ethernet consult customer service for compatibility	POEC
Custom dimming consult customer service for compatibility	XXXX

J OUTPUT LM/FT

300 lm/ft 100% ↧	0300LF
425 lm/ft 100% ↧	0425LF
600 lm/ft 100% ↧	0600LF

K CIRCUIT / EM

Single circuit * leave blank	*
EMB EM battery pack emergency battery pack only for 120/ 277V option (90 minute emergency operation)	EMB

L SHAPE / PATTERN

Linear / straight	ST

M DIMENSIONS IN FT

4' fixture	04FT
6' fixture	06FT
8' fixture	08FT
Custom length Consult Factory	###IN

fixture replaces full length of ceiling panel; please see table on next page and fixture length dimensions

BASO
basolighting.com

Technical data

	SIZE TYPE	LEDCOLOR TEMPERATURE	INPUT WATTS	DELIVERED LMTOTAL	LIGHT DISTRIBUTION	DELIVERED LUMENDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
PANO 2"								
e LED	8' opal	40K	20.3W	2200lm	100% down	2200lm	70%	108lm/W
e2LED	8' opal	40K	31.2 W	3400lm	100% down	3400lm	70%	109lm/W
e2+ LED	8' opal	40K	44.7 W	4800lm	100% down	4800lm	70%	107lm/W

for 27K, 30K or 35K multiply lm value by 0.96

WoodWorks® Grille Ceiling System Integration

(for more ceiling options, please see CEILING OPTIONS pages)

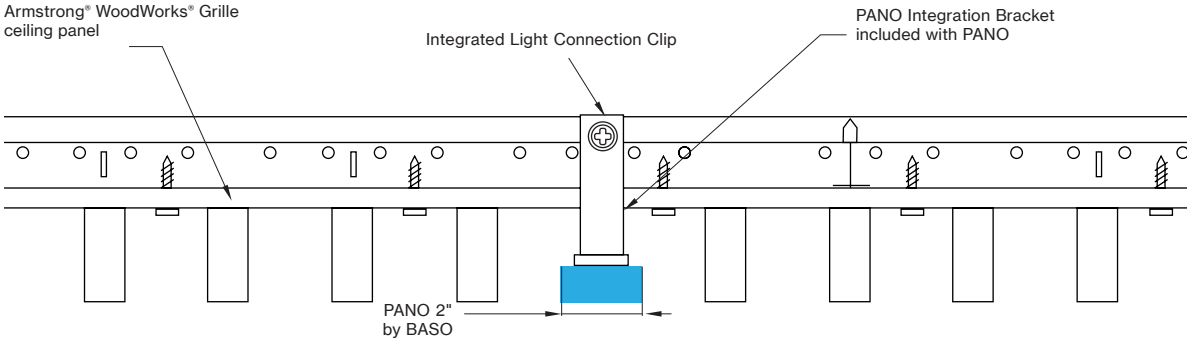

Available lengths for ceiling types

WGF view from below

CEILING TYPE	2FT	4FT	6FT	8FT
WoodWorks® Grille Tegular 9/16	23.375"	47.375"	n/a	n/a
WoodWorks® Grille Tegular 15/16	23"	47"	n/a	n/a
WoodWorks® Grille Classic	23"	47"	71"	95"
WoodWorks® Grille Forte	*23"	47"	71"	95"
WoodWorks® Linear Solid Wood panels	*23"	*47"	*71"	95"
WoodWorks® Linear Veneered panels	*23"	*47"	*71"	95.25"

*Woodworks ceilings are not available in this length. Wood panels need to be cut in the field to fit this length.

INTEGRATED LIGHT CONNECTION CLIP

Integrated Light Connection Clip	ACC-PANO-FC-2

Required to be ordered with the fixture

Quantity needed per fixture

Length	Qty
8FT	4
6FT	4
4FT	3
2FT	2

PANO 2"

WWG - ARMSTRONG® WOODWORKS® GRILLE PANELS

WWG

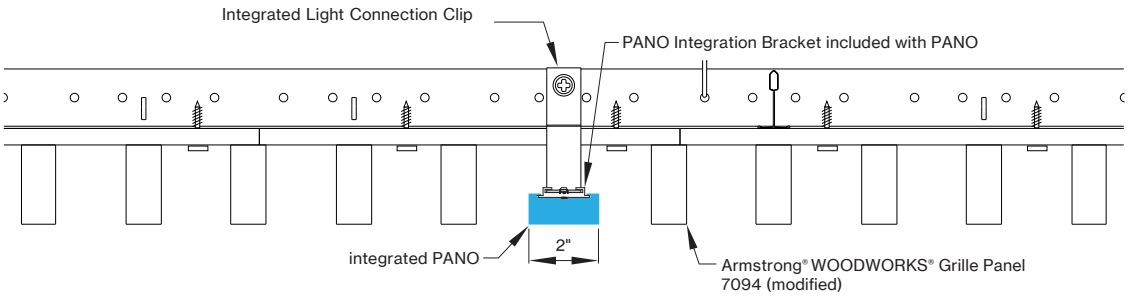

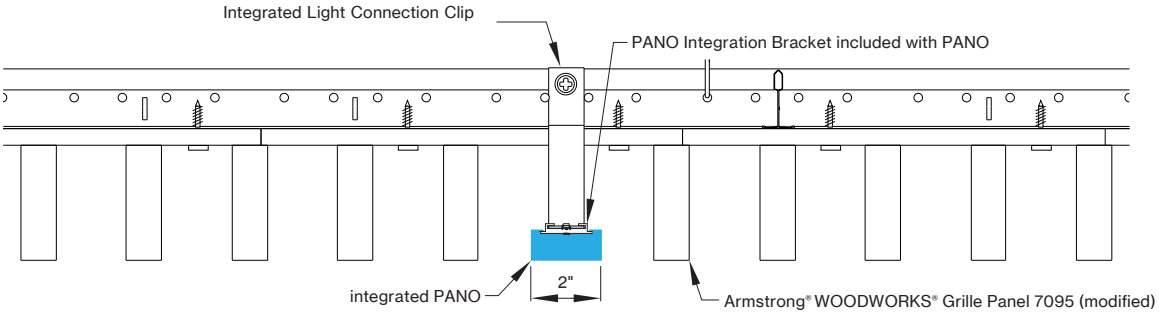

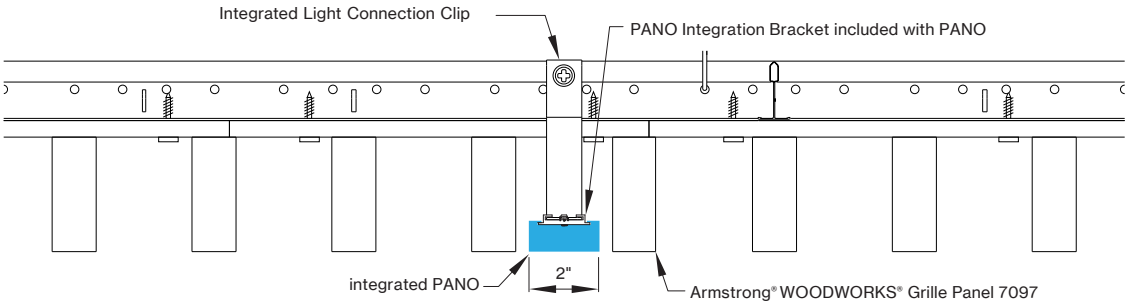

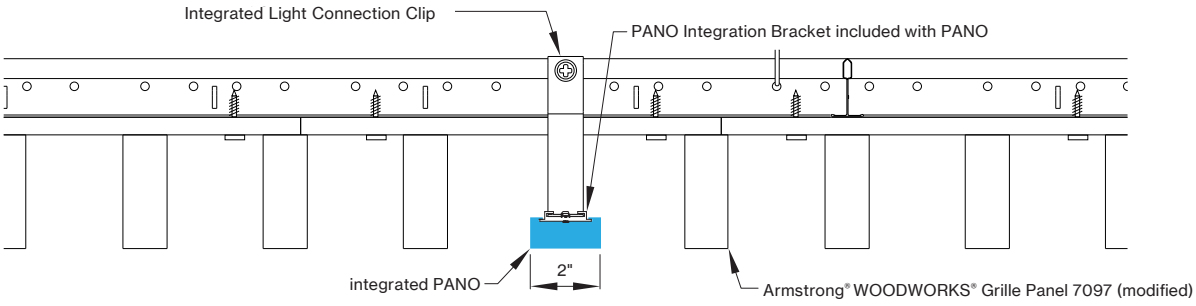

WWG - ARMSTRONG® WOODWORKS® GRILLE PANELS cont'd

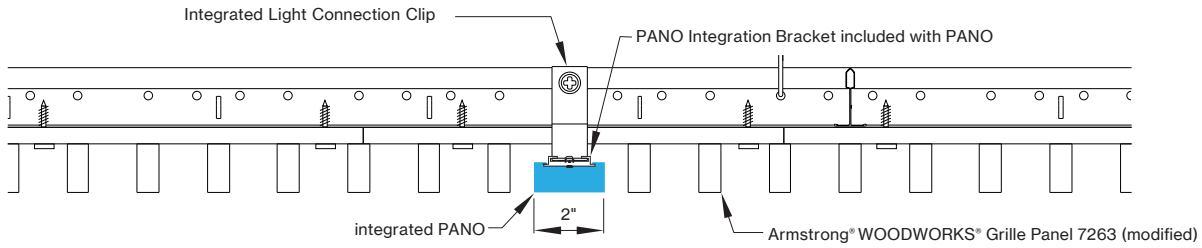

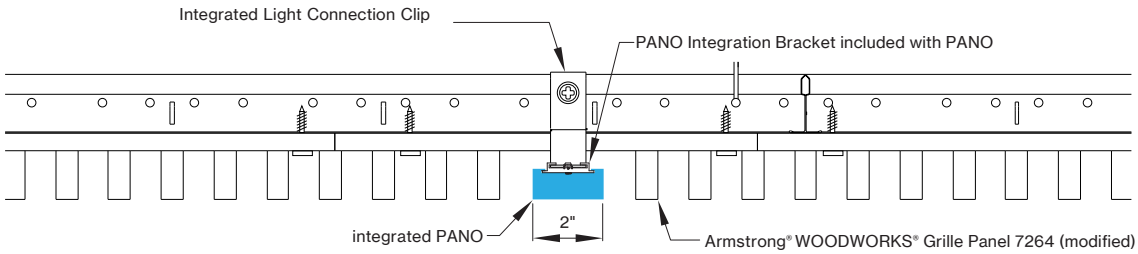

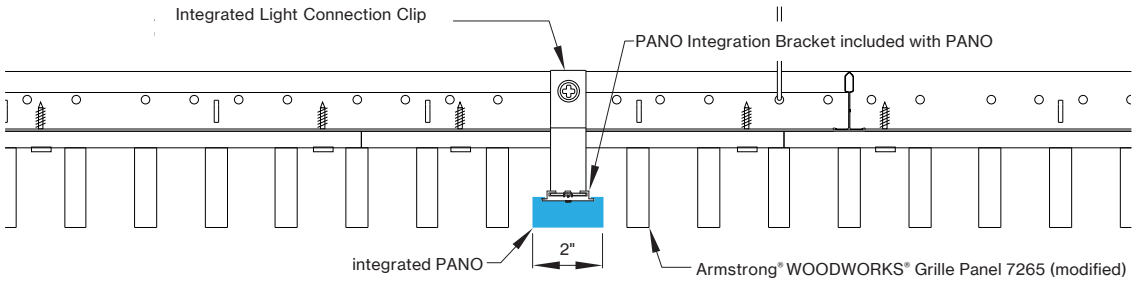

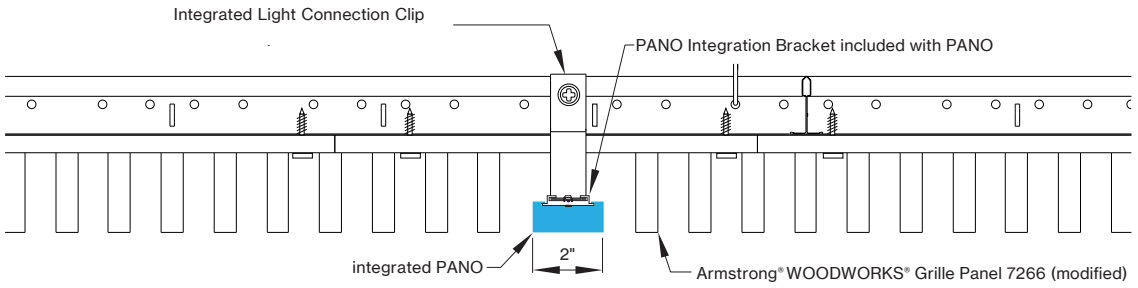

PANO mounting instructions

Get access to the PANO mounting instructions faster by scanning the QR code.

https://www.basolighting.com/resources/mounting-instructions/pano